



PACKAGED HOT WATER BOILER
100 HP TO 200 HP



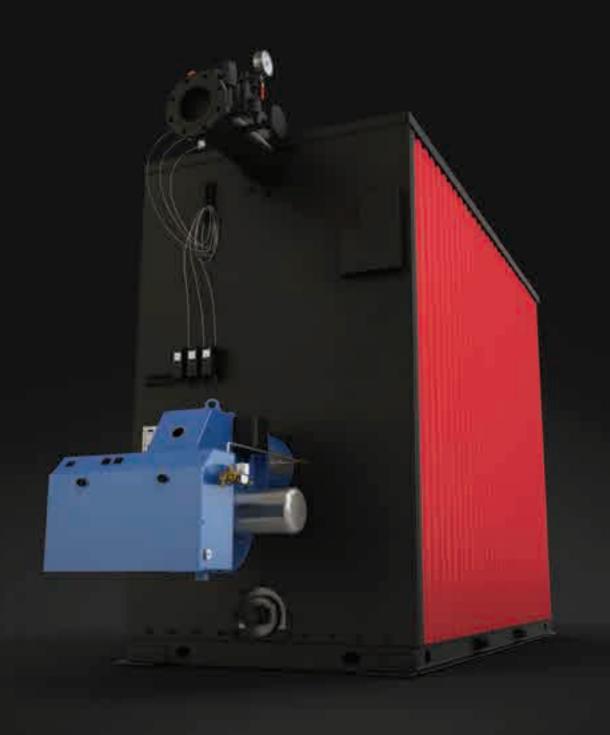

PHYSICAL DATA SHEET

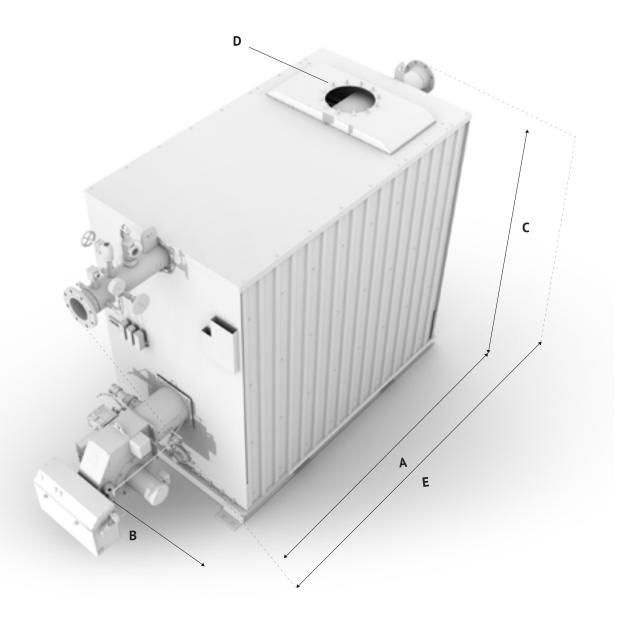

Boiler Model Number	Capacity MMBtu/hr	A Length (Base)	B Width (Base)	C Height (Overall)	D Gas Outlet	E Length (Overall)	WEIGHT (lb)	
							Dry	Flooded
C-100W	3,450	80"	55"	99"	12" dia.	136"	6,000	7,080
C-125W	4,312	86"	55"	99"	16" dia.	142"	6,600	7,770
C-150W	5,175	98"	55"	99"	16" dia.	154"	7,800	9,160
C-175W	6,037	107"	55"	99"	18" dia.	163"	8,700	10,200
C-200W	6,900	120"	55"	99"	18" dia.	175"	9,900	11,600



POWER TO GROW

Simoneau introduces the COMMANDER® series, available in 5 sizes from 100-200 HP. Designed with your space in mind, this low footprint will help you achieve the most compact installations possible, without sacrificing power.



HOT WATER UP TO 240°F







LOW TCO



ASME COMPLIANT CONSTRUCTION (SECTION IV)

- O type construction (tangent staggered tube configuration)
- Ferrule tube construction
- Up to +5" water column gas side pressure
- No use of any refractory cement
- High thermal shock resistance
- Factory tested pressure parts
- Minimum 1.5" diameter tubes
- SA-178 grade "A" material
- 11 gauge and reinforced steel panels
- Scratch-resistant insulated jacket panels and powder coated

The Commander Series is able to meet the most stringent emissions throughout North America. Flexibility of choice in NOx reduction techniques has been our driving force. Using a renowned burner manufacturer that could provide a reliable solution is a key success factor.

NOx emissions as low as 9 ppm are available on straight gas burners.

COMBUSTION SYSTEM VERSATILITY

STANDARD

Equipped with Honeywell 7800

CERTIFIED UPGRADE

Honeywell links Siemens LMV 3x, 5x

